

Specification

Nominal Basket Diameter	12", 304.8mm
Nominal Impedance*	8 ohms
Power Rating**	120W
Resonance	89Hz
Usable Frequency Range	80Hz-5kHz
Sensitivity***	100.9
Magnet Weight	38 oz.
Gap Height	0.312", 7.92mm
Voice Coil Diameter	1.75", 44.5mm

Thiele & Small Parameters

Resonant Frequency (fs)	89Hz
DC Resistance (Re)	6.37
Coil Inductance (Le)	0.64mH
Mechanical Q (Qms)	11.98
Electromagnetic Q (Qes)	0.83
Total Q (Qts)	0.77
Compliance Equivalent Volume (Vas)	39.4 liters / 1.4 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	42cc
Mechanical Compliance of Suspension (Cms)	0.10mm/N
BL Product (BL)	11.5 T-M
Diaphragm Mass inc. Airload (Mms)	30 grams
Efficiency Bandwidth Product (EBP)	107
Maximum Linear Excursion (Xmax)	0.8mm
Surface Area of Cone (Sd)	519.5 cm ²
Maximum Mechanical Limit (Xlim)	

Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	Acceptable
Overall Diameter	12.03", 305.5mm
Baffle Hole Diameter	10.95", 278.1mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	11.59", 294.3mm
Depth	6.06", 154mm
Net Weight	8.1 lbs., 3.7 kg
Shipping Weight	10.1 lbs., 4.6 kg

Materials of Construction

Copper voice coil
Polyimide former
Ferrite magnet
Non-vented core
Pressed steel basket
Paper Cone
Paper cone edge
Solid composition felt dust cap




EMINENCE[®]
The Art and Science of Sound

LEGEND V128

Classic British rock guitar tone. Very mellow, but with lots of definition and rich tonal harmonic balance. Medium break-up modes. Very smooth.

Coloration: A very balanced speaker with lots of definition and rich harmonic detail. More mellow than most Red Coats.

Genre: Classic Rock and Blues

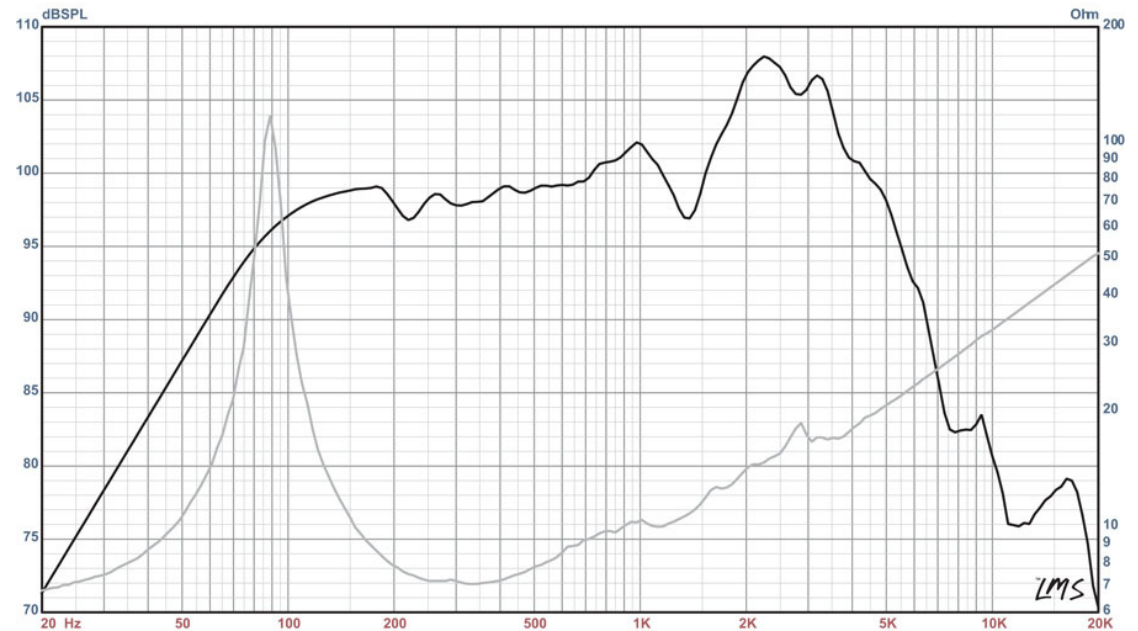

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)